

Features

- Special material and design for high working voltage required.
- Compatible with flow and reflow soldering.
- Suitable for lead free soldering.
- Voltage Coefficient Resistance (VCR) $\leq \pm 300\text{ppm/V}$.

Applications

- Power supply.
- Automotive industry.
- Measurement instrument.
- Back light inverter.
- Medical equipment.


Part Number

Type	Size	Tolerance	Packing	-	GM
FVF	03: 0603 05: 0805 06: 1206 12: 1210 20: 2010 25: 2512	F: $\pm 1\%$ J: $\pm 5\%$	T: Paper tape – 5 Kpcs V: Paper tape – 10 Kpcs W: Paper tape – 20 Kpcs P: Plastic tape – 4 Kpcs X: Plastic tape – 8 Kpcs Y: Plastic tape – 16Kpcs		106

Rating

Type	Size	Power Rating at 70°C	Max. RCWV	Max. Overload Voltage	Resistance Tolerance (%)	Temperature Coefficient (ppm/°C)	Resistance Range		Standard Resistance Values
							Min.	Max.	
FVF03	0603	1/10W	200V	400V	$\pm 1\%$ (F)	± 100	100K Ω	10M Ω	E96/E24
					$\pm 5\%$ (J)	± 200	100K Ω	22M Ω	E24
FVF05	0805	1/8W	400V	800V	$\pm 1\%$ (F)	± 100	100K Ω	10M Ω	E96/E24
					$\pm 5\%$ (J)	± 200	100K Ω	22M Ω	E24
FVF06	1206	1/4W	800V	1600V	$\pm 1\%$ (F)	± 100	100K Ω	10M Ω	E96/E24
					$\pm 1\%$ (F)	± 200	11M Ω	22M Ω	E24
					$\pm 5\%$ (J)	± 200	100K Ω	100M Ω	E24
FVF20	2010	1/2W	2000V	3000V	$\pm 1\%$ (F)	± 100	100K Ω	10M Ω	E96/E24
					$\pm 1\%$ (F)	± 200	11M Ω	22M Ω	E24
					$\pm 5\%$ (J)	± 200	100K Ω	100M Ω	E24
FVF25	2512	1W	3000V	4000V	$\pm 1\%$ (F)	± 100	100K Ω	10M Ω	E96/E24
					$\pm 1\%$ (F)	± 200	11M Ω	22M Ω	E24
					$\pm 5\%$ (J)	± 200	100K Ω	100M Ω	E24

Dimension and Construction

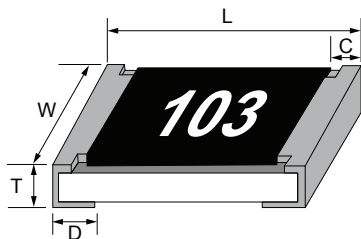

unit: mm

Type	L	W	C	D	T
FVF03	1.60 \pm 0.10	0.80 \pm 0.10	0.30 \pm 0.20	0.30 \pm 0.20	0.45 \pm 0.10
FVF05	2.00 \pm 0.10	1.25 \pm 0.10	0.40 \pm 0.20	0.40 \pm 0.20	0.50 \pm 0.10
FVF06	3.10 \pm 0.10	1.60 \pm 0.10	0.50 \pm 0.20	0.50 \pm 0.20	0.55 \pm 0.10
FVF20	5.00 \pm 0.20	2.50 \pm 0.20	0.65 \pm 0.25	0.60 \pm 0.25	0.60 \pm 0.10
FVF25	6.40 \pm 0.20	3.20 \pm 0.20	0.65 \pm 0.25	0.90 \pm 0.25	0.60 \pm 0.15

Power Derating Curve

