

CE-LD Series

Long Life

4.5mm Height




- 105°C 2,000 to 3,000hours
- Solvent proof (within 2 minutes)
- AEC-Q200

Specifications

Items	Condition	Specifications						
Rated voltage (V)	—	6.3	10	16	25	35	50	
Surge voltage (V)	Room temperature	8.0	13	20	32	44	63	
Category temperature range (°C)	—	-40 to +105						
Capacitance tolerance (%)	120Hz/20°C	M : ±20						
Dissipation Factor (tan δ)	tanδ (max.) 120Hz/20°C	0.35	0.30	0.20	0.16	0.14	0.12	
Leakage current (LC)	μA/after 2minutes (max.), 20°C	The greater value of either 0.01CV or 3						
Impedance ratio at low temperature	Based on the value at 120Hz, +20°C	-25°C Z/Z _{20°C}	4	3	2	2	2	2
		-40°C Z/Z _{20°C}	10	8	6	4	4	4
Endurance	105°C rated voltage applied (With the rated ripple current)	Test	φ4 to φ5 : 2,000hours, φ6.3 : 3,000hours					
		ΔC/C	Within ±30% of the initial value					
		tanδ	Less than 300% of the specified value					
		LC	Less than the specified value					

Marking, Dimensions

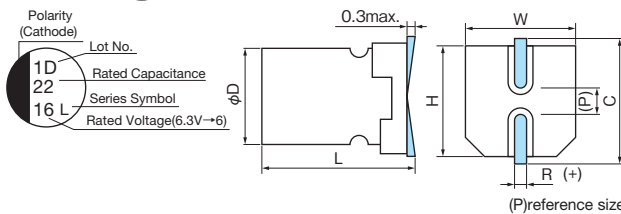

(Unit : mm)

D ^{±0.5}	L ^{+0.1 -0.2}	W ^{±0.2}	H ^{±0.2}	C ^{±0.2}	R	P
4	4.5	4.3	4.3	5.0	0.5 to 0.8	1.0
5	4.5	5.3	5.3	6.0	0.5 to 0.8	1.4
6.3	4.5	6.6	6.6	7.3	0.5 to 0.8	2.2

Size, Rated Ripple Current

μF \ V	6.3	10	16	25	35	50
0.47						4×4.5 2.8
1.0						4×4.5 5.9
2.2						4×4.5 10
3.3						4×4.5 12
4.7				4×4.5 12	4×4.5 13	5×4.5 15
10			4×4.5 17	5×4.5 19	5×4.5 24	6.3×4.5 24
22	4×4.5 20	5×4.5 24	5×4.5 26	6.3×4.5 33	6.3×4.5 35	
33	5×4.5 26	5×4.5 29	6.3×4.5 36	6.3×4.5 40		
47	5×4.5 32	6.3×4.5 38	6.3×4.5 43	6.3×4.5 44		
100	6.3×4.5 49	6.3×4.5 52				

Please refer to page 14 for ripple current frequency coefficients.

Case size: φDxL (mm)

Rated ripple current
mA rms (120Hz, 105°C)

Part number

